MHT 200

6 CHANNEL AUDIO/VIDEO SYSTEM CONTROLLER
(TUNER READY)

McIntosh

The Compendium

FRONT PANEL: **Glass with illuminated teal/gold nomenclature.** INPUT. **Operating mode display:** DOLBY DIGITAL, PRO LOGIC II, DTS, EXPAND, EX, NEO:6, DTS-ES, STEREO 96. VOLUME. 7 TRIM SELECT **switch:** OFF, SUBWOOFER, SURround SPeaKeR, CENTER SPeaKeR, TREBLE, BASS, TUNE, DISPLAY. **Digital display:** INPUT, % VOLUME, SIGNAL, FREQUENCY **and** PRESET. POWER GUARD **lights:** LEFT FRONT, CENTER, RIGHT FRONT, LEFT SURround, RIGHT SURround. SURROUND MODE **switch:** EXTERNAL, CINEMA 2, CINEMA 1, STEREO, MUSIC 1, MUSIC 2, MUSIC 3, MUSIC 4. 7 CALIBRATION MIC **jack. Touch buttons:** , TRIM / TUNE, TRIM / TUNE • . IR SENSOR. **Touch button:** LATE NIGHT **(with indicator).** HEADPHONES **jack. Touch button:** ZONE B **(with indicator).** SETUP **button. Touch buttons:** SYS OFF, STANDBY/ON **(with indicator),** POWER ON **and** OFF. AM/FM **TM 1 tuner is optional.**

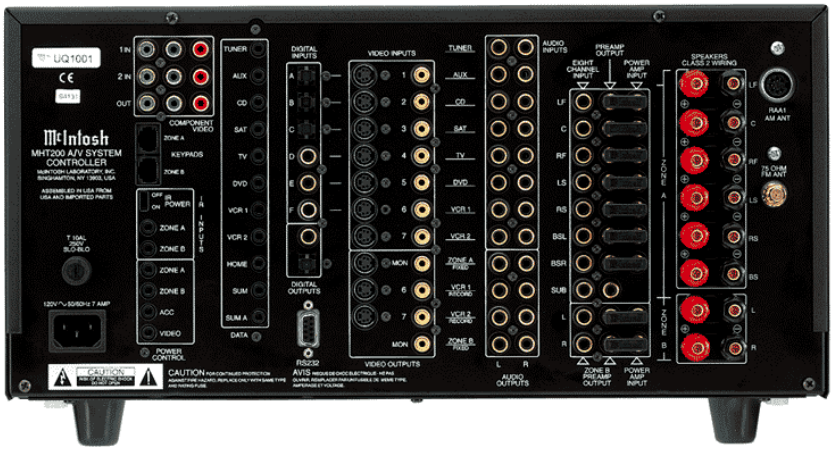

BACK PANEL: FUSE. **Power cord receptacle.** Ú COMPONENT VIDEO IN**puts 1 and 2: Y, PR and PB. Zone A monitor** COMPONENT VIDEO OUT**puts: Y, PR and PB.** KEYPAD **connectors:** ZONE A **and** B. IR INPUTS: IR POWER **switch:** OFF **or** ON, **inputs for** ZONE A **and** ZONE B. POWER CONTROL **out for** ZONE A **and** ZONE B, ACC**essory, and** VIDEO. Ú DATA **ports for**

TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2, HOME, SUM, SUM A. Ú **Optical** DIGITAL INPUTS: AUX, CD **and** SAT. **Coaxial** DIGITAL INPUTS: TV, DVD **and** VCR 1. **Coaxial and optical** DIGITAL OUTPUTS. RS232 POWER **connector.** Ú **S-video and composite** VIDEO INPUTS: AUX, CD, SAT, TV, DVD, VCR 1 **and** VCR 2. **S-video and composite** VIDEO OUTPUTS: ZONE A MONitor, VCR 1 **and** VCR 2. **Composite** VIDEO OUTPUT **for** ZONE B MONitor. Ú **Analog** AUDIO INPUTS: TUNER, AUX, CD, SAT, TV, DVD, VCR 1, VCR 2. **Analog** AUDIO OUTPUTS: ZONE A, VCR 1 RECORD, VCR 2 RECORD, ZONE B. Ú **8-channel inputs for** EXTERNAL PROCESSOR: LF, C, RF, LS, RS, BSL, BSR **and** SUB. PREAMP OUTPUT /I POWER AMP INPUT: LF, C, RF, LS, RS, BSL, BSR. PREAMP OUTPUT **for** SUB. ZONE B POWER AMP INputs. ZONE B PREAMP OUTPUT /I POWER AMP INPUTS. Ú SPEAKER **output binding posts for** ZONE A: LF, C, RF, LS, RS, BSR **and** ZONE B **Left and** Right. Ú **Spaces reserved for optional TM 1 tuner module:** ANTENNA 2: **external** AM ANTenna **(RAA1) and 75 Ω** FM ANTenna **coax input.**

SPECIFICATIONS:

ZONE A -
6-channel: 120w/ch into 4 ohms or 80w/ch into 8 ohms.
5-channel: 130w/ch into 4 ohms or 85w/ch into 8 ohms.
3-channel: 140w/ch into 4 ohms or 90w/ch into 8 ohms.
2-channel: 160w/ch into 4 ohms or 100w/ch into 8 ohms.

ZONE B -
2-channel: 150w/ch into 4 ohms or 95w/ch into 8 ohms.

Response: **20-20kHz (+0 –0.25dB).** ***Distortion:*** **.05%.** ***Signal to Noise Ratio:*** **power amp -112dBA.** ***Output Load Impedance:*** **4 ohms or 8 ohms.** ***Input Impedance:*** **Power Amp 20k.** ***Input Sensitivity:*** **Power Amp 1.0V.** ***Tone Controls:*** **boost or cut 10dB.** ***Power Guard. Sentry Monitor.*** **Direct coupled.**

Power Requirements: **120V at ?? Watts.**

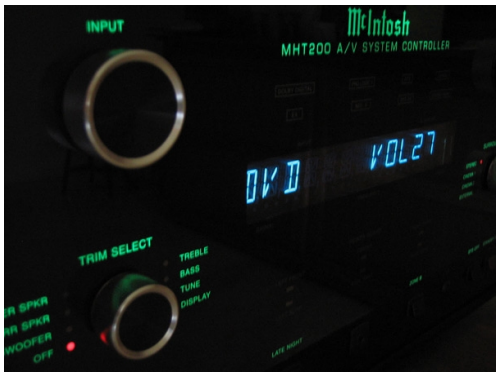

MHT 200 - Sold from May 2003 - ????. S/N: UQ1001~UQ????

Size: **9-7/16"H, 17-3/4"W and 19"D.** ***Weight:*** **73 lb.** ***$6,100.00***